

Features & Benefits

- ✘ Pre-terminated, pre-tested and colour coded
- ✘ Makes on-site installation quick and easy
- ✘ Suitable for Net10G, Net6 & Net5E systems
- ✘ 25 Year warranty available
- ✘ Terminated in a quality controlled factory
- ✘ 100% tested to relevant cabling standard
- ✘ Measuring, pre-installation services and training available

Express Options


| | |
|-----------------------|----------------------|
| Length | Customer Specified |
| Number of Cable | 4, 6 or 12 Way |
| Type of Cable | Cat5E, Cat6 or Cat6A |
| Cable Jacket Material | PVC or LSZH |



Quality controlled factory pre-terminated links.



Links pre-tested to relevant cabling standards.

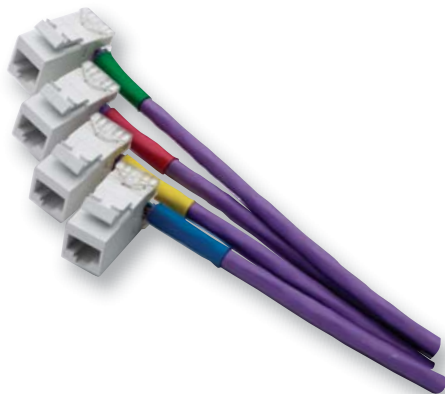

The Connectix Express system has been designed to offer the easiest and quickest method of installing Copper links P.

With more and more installation jobs becoming time critical, minimising on-site IDC or fibre termination time has never been more crucial.

With Connectix Express, all the time consuming terminations are made, tested and labelled in a quality controlled factory. All the installer has to do is mount the unloaded panels into a cabinet, pull in the pre-terminated links, mount the sockets in the unloaded panel and the outlets where required.

To ensure the correct length links are ordered, Connectix can offer training for pre-installation surveys and measuring. Alternatively, Connectix can visit site and carry out the work.